



RDW

Vehicle Technology Division

THE NETHERLANDS  
(N E D E R L A N D)



COMMUNICATION

Concerning <sup>(1)</sup>:

- ~~approval granted~~
- approval extended
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of pneumatic tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4-30R-0251649

Extension number: 01

Approval mark:



0251649


1. Manufacturer's name or trade mark(s) : JINYU; TRAXXION; EVERGREEN;  
on the tyre type EFFIPLUS; SUNITRAC
2. Tyre type designation by the : YH12; TECH II+; EH23; SATEC III;  
manufacturer FOCUS 9000
3. Manufacturer's name and address : Shandong Jinyu Tyre Co., Ltd.  
Dawang Economic development Zone,  
Dongying, Shandong Province, 257335  
P.R. China
4. If applicable, name and address of the : not applicable  
manufacturer's representative
5. Summarised description :
- 5.1. Tyre size designation : 225/65R17
- 5.2. Category of use : normal/~~snow~~/temporary use <sup>(1)</sup>
- 5.3. Structure : ~~diagonal/bias belted~~/radial



Approval number: E4-30R-0251649

Extension number: 01

- 5.4. Speed category symbol : H
- 5.5. Load-capacity index : 102
6. Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity : TÜV Rheinland Kraftfahrt GmbH  
Technologiezentrum Verkehrssicherheit  
Typprüfstelle Fahrzeuge/Fahrzeugteile  
Am Grauen Stein  
D-51105 Köln (Poll)
7. Date of report issued by that service : April 21, 2011  
September 02, 2011
8. Number of report issued by that service : 86-R30-1029/09  
86-R30-823/11
9. Reason(s) of extension (if applicable) : addition of trade mark and tyre type designation
10. Any remarks : ---
11. Approval : ~~granted/extended/refused/withdrawn~~ <sup>(1)</sup>
12. Place : Zoetermeer
13. Date : 30-sep-2011
14. Signature :

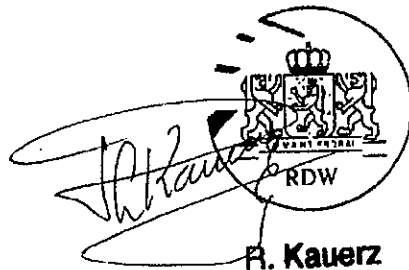


The image shows a handwritten signature in black ink, which appears to be 'R. Kauerz', written over a circular stamp. The stamp contains the RDW logo, which features a crown and a shield with a lion, and the letters 'RDW' below it.

15. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.


- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
- The test report as mentioned in item 8.

---


<sup>(1)</sup> Strike out what does not apply.

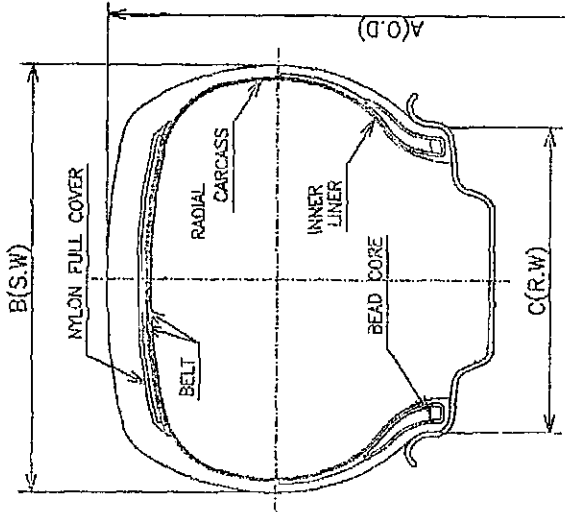


TREADWEAR INDICATOR

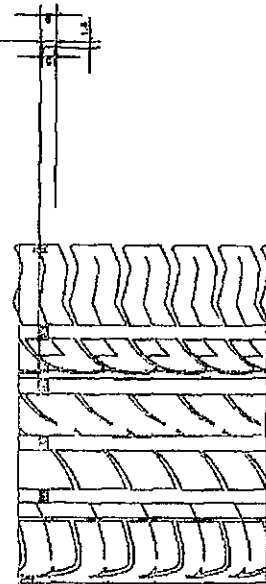

FOCUS 9000

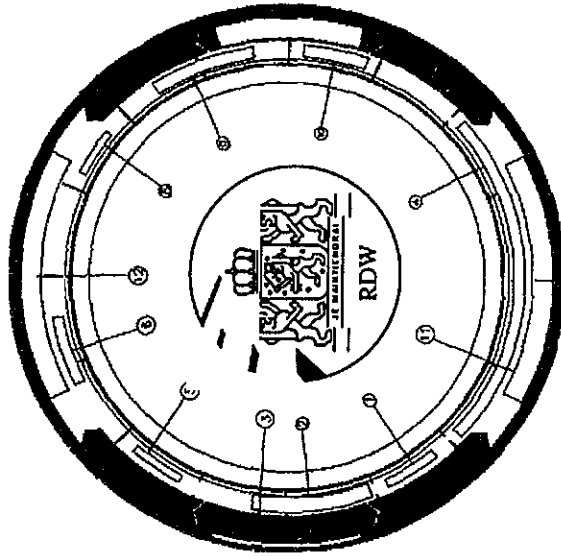

UPPER

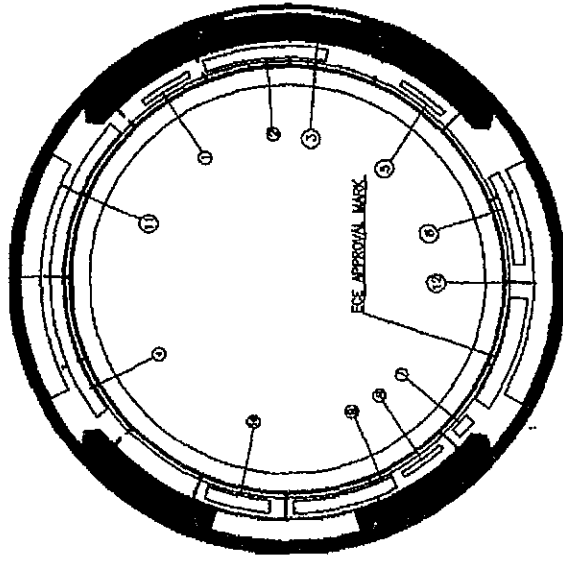

LOWER

1	RADIAL TUBELESS	10	MAX. LOAD 850Kg(1874LBS) MAX. PRESS. 300kPa (4PSI)
2	225/65R17 102H		
3	TREADWEAR 400 TRACTION A TEMPERATURE A	11	SUNITRAC
4	SAFETY WARNING		
5	STANDARD RIM: 6 1/2 J	12	FOCUS 9000
6	DOT KEBL CLG XXXX(DATE CODE)		
7	<del>MADE</del>		
8	MADE IN CHINA		
9	TREAD: 5 PLYS (2POLYESTER+2STEEL+NYLON) SIDEWALL: 2 PLYS POLYESTER		

TIRE SIZE	A(mm)	B(mm)	C(INCH)	LOAD INDEX SPEED CODE	REMARK
225/65R17	724	228	6.5	102H	

SCALE : FREE	DATE : 10/07/23	DESIGNED BY	DRAWN BY	CHECKED BY	APPROVED BY	DRAWING NO.	
			Yang nian long	Fico sheng long	Zhuo suo yong	E4--AXBJ	
SHANCONG JINTU TIRES CO., LTD						TITLE	225/65R17 102H

Manufacturer : SHANDONG JINYU TYRE CO., LTD.  
Type : 225/65R17



## TEST REPORT

According to ECE-Regulation

**Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers**

ECE-R30, Amend.02, Suppl. 16

---

Approval Status

Previously granted  
ECE type – approval : E4-30R-0251649 Ext.00

---

Structure of report:

- | Item No.   |                         |
|------------|-------------------------|
| 1.         | General information     |
| 2.         | Test object             |
| 3.         | Test record             |
| 4.         | List of Appendices      |
| 5.         | Statement of conformity |
| Appendix 0 | List of modifications   |



---

The Test Report shall be reproduced and published in full by the client only. It shall however be reproduced partially with the written permission of the Testing Laboratory only.



**Manufacturer** : SHANDONG JINYU TYRE CO., LTD.  
**Type** : 225/65R17

**1. General information**

- 1.1. Manufacturer's name and address : SHANDONG JINYU TYRE CO., LTD.  
Dawang Economic development Zone,  
Dongying, Shandong Province, 257335  
P.R. China
- 1.2. Technical service responsible for carrying out the tests : TÜV Rheinland Kraftfahrt GmbH  
Technologiezentrum Verkehrssicherheit  
Typprüfstelle Fahrzeuge/Fahrzeugteile  
Am Grauen Stein  
D-51105 Köln (Poll)
- 1.3. Type : 225/65R17
- 1.4. Trade mark(s) : JINYU; TRAXXION; EVERGREEN; EFFIPLUS  
SUNITRAC
- 1.5. Tread pattern name(s) : YH12; TECH II+; EH23; SATEC III  
FOCUS 9000
- 1.6. No. of the information folder : ---  
- Date of issue : ---  
- Date of last change : ---

**2. Test object**

- 2.1. Markings
  - 2.1.1. Trade mark : JINYU
  - 2.1.2. Tread pattern name : YH12
  - 2.1.3. Plies
    - Tread : 2 POLYESTER + 2 STEEL + 1 NYLON
    - Side wall : 2 POLYESTER
  - 2.1.4. Size designation : 225/65R17
  - 2.1.5. Special protective band : no
  - 2.1.6. Category of use : normal
  - 2.1.6. Structure : radial
  - 2.1.7. Speed category : H
  - 2.1.8. Load-Capacity Indices : 102
  - 2.1.9. Ply-rating number for diagonal (bias-ply) tyres : ---
  - 2.1.10. Indication 1 : tubeless
  - 2.1.11. Indication 2 : not reinforced
  - 2.1.12. Date of manufacture : 2510





**Manufacturer** : SHANDONG JINYU TYRE CO., LTD.  
**Type** : 225/65R17

2.1.13 Identification number : ---  
 2.2 Remarks :

all versions of the types as stated in the information document are covered with the tested test object respectively.

**3. Test record**

3.1. Equipment for measuring and testing : The test facilities / measurement equipment used were in compliance with the test requirements.

3.2. Test results

Remark concerning extension :

~~[The type has been tested according to the modification(s) mentioned in item Appendix 0.]~~

[The results of previous test are still valid.]

3.2.1. Dimension Measurement according to Annex 6

3.2.1.1 Measuring rim : 6.5J × 17

3.2.1.2 Inflation pressure (after mounting 3 to 3.5 bar) : 3.0 bar

3.2.1.3 Inflation pressure (readjusted before conditioning) : 1.8 bar

3.2.1.4 Duration of conditioning of mounted tyre pre-measuring at ambient room temperature : more than 24 hours

3.2.1.5 Inflation pressure (readjusted after conditioning) : ---

3.2.1.6 Overall width at six equally spaced points : Height of six equally spaced tread wear indicators

1.	226	mm	1.	1.8	mm
2.	227	mm	2.	1.8	mm
3.	226	mm	3.	1.7	mm
4.	227	mm	4.	1.9	mm
5.	227	mm	5.	1.9	mm
6.	226	mm	6.	1.9	mm
Max.:	227	mm			

3.2.1.7 Circumference : 2265 mm

3.2.1.8 Outer diameter : 721 mm

3.2.2 Load/speed performance test according to ANNEX 7

3.2.2.1 Test machine : TM1103

3.2.2.2 Diameter test drum : 1.707 m

3.2.2.3 Test rim : 6.5J × 17

3.2.2.4 Conditioning of mounted tyre pre-testing at test-room temperature : more than 3 hours





**Manufacturer** : SHANDONG JINYU TYRE CO., LTD.  
**Type** : 225/65R17

- 3.2.2.5 Test-room temperature : 35.0°C
- 3.2.2.6 Inflation pressure (readjusted before conditioning) : 2.8 bar
- 3.2.2.7 Inflation pressure (readjusted after conditioning) : 2.8 bar
- 3.2.2.8 Circumference after conditioning, before testing : 2266 mm
- 3.2.2.9 Outer diameter : 721.3 mm
- 3.2.2.10 Inflation pressure : 2.8 bar
- 3.2.2.11 Load (80%) : 680 kg

Step	Step-Duration [min]	Total Duration [min]	Actual speed (km/h)
1.	10	10	0-170
2.	10	20	170
3.	10	30	180
4.	10	40	190
5.	20	60	200

- 3.2.2.12 Conditioning after testing at test-room temperature : more than 6 hours
- 3.2.2.13 Inflation pressure : 2.8 bar
- 3.2.2.14 Circumference after conditioning, after testing : 2277 mm
- 3.2.2.15 Outer diameter : 724.8 mm
- 3.2.2.16 Difference outer diameter before and after testing (max. 3.5 %) : 3.5 mm  
: 0.49%

**3.3 Additional information**

The results of the test refer exclusively to object mentioned under point 2.1. of this report.

- Test site : SHANDONG JINYU TYRE CO., LTD.  
Dawang Economic development Zone,  
Dongying, Shandong Province, 257335  
P.R. China
- Test date : January 07, 2011
- Remark : The results of the test refer to report No.  
86-R30-1029/09.

**4 List of Appendices**

- 0 List of modifications

**5 Statement of conformity**

The information folder and the type described there comply with the requirements mentioned in page 1.

The test laboratory is accredited for the above mentioned tests by the accreditation body of the RDW, Vehicle Technology and Information Centre, as the competent Administrative Department for the Netherlands; Accreditation No: RDW-99050014 -05.

Cologne, September 02, 2011  
LZT / LX

Dipl.-Ing. Li Zhitao

Manufacturer : SHANDONG JINYU TYRE CO., LTD.  
Type : 225/65R17



List of modifications

Appendix 0

Correction of : ---

Modification of : ---

Addition of : trade mark and tyre type designation

Deletion of : ---

